

Bali® Essentials



Product Information Guide and Price List for
**Cordless Faux Wood, Vinyl, Cellular,
and Verticals**
United States
July 2019



Table of Contents

How to Measure

Inside Mount	3
Outside Mount: Horizontal Blinds and Cellular Shades	3
Outside Mount: Vertical Blinds	3

Cordless Faux Wood Blinds

Product Detail	4
Size Considerations	4
Valance Options	5
Price Chart: Solid 2" Faux Wood	5
Price Chart: Woodgrain 2" Faux Wood	5

Cordless Vinyl Blinds

Product Detail	6
Size Considerations	6
Price Chart: 1" Vinyl	7

Cordless Cellular Shades

Product Detail	8
Size Considerations	8
Price Chart: Light Filtering Cellular	9
Price Chart: Blackout Cellular	9

Vertical Blinds

Product Detail	10
Size Considerations	10
Price Chart: Crown Verticals	11
Price Chart: Chams, Dune, Maui Verticals	12


How to Measure

Measure each window individually as size variances are common. Record width first, then height (also referred to as length) to the nearest $\frac{1}{8}$ ". Measure width from left to right, height from top to bottom, using a steel tape measure. Do not use a cloth tape.

Inside Mount

Inside mount blinds are installed inside the window casing. **Window casing must be at least the listed depths for inside mount blinds.**

Type of Blind	Minimum Depth Mount (inches)	Depth Needed for Full Recess (inches)
Vinyl	$\frac{3}{4}$	$1\frac{3}{4}$
Faux Wood—Headrail Only	1	$2\frac{5}{8}$
Faux Wood—Headrail with Standard Valance	1	$3\frac{1}{8}$
Faux Wood—Headrail with Decorative Valance	1	$3\frac{1}{4}$
Cellular	$1\frac{1}{2}$	$2\frac{1}{8}$
Verticals—Flush Track	$2\frac{3}{4}$	$4\frac{5}{8}$
Verticals—Flush Vane	$3\frac{3}{4}$	$4\frac{5}{8}$

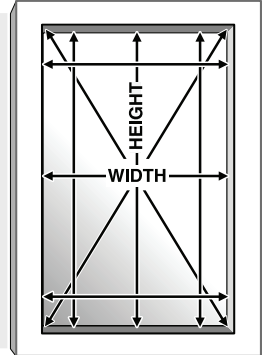


1. Measure the exact inside width of the window casing from one inside edge to the other in three different places. Record the narrowest measurement.
2. Measure the exact height in three different places from top edge of opening to top of sill. Record the longest measurement. (Verticals: Record the shortest measurement.)
3. Measure the window diagonally in two places as shown. If the two diagonal dimensions are not equal, we recommend an outside mount application for optimal function and aesthetics.
4. Do not take deductions. Allowances are made at the factory to ensure a perfect fit.

Outside Mount: Horizontal Blinds and Cellular Shades

Outside mount blinds are installed outside the window casing, covering an area larger than the window itself.

1. Measure the exact width to be covered. If window opening allows, overlap by at least $1\frac{1}{2}$ " on each side (3" total overlap) to ensure light control and privacy.
2. Measure the exact height to be covered, including desired overlap (typically from top edge of molding to bottom edge, or to top of sill if there is one).
3. The factory makes NO allowances on outside mount.

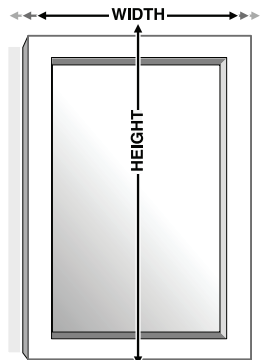


Outside Mount: Vertical Blinds

Outside mount blinds are installed outside the window casing, covering an area larger than the window itself.

1. Measure the exact width of the window, including the frame if there is one. Add 3" for each side (6" total overlap) to ensure light control and privacy.
2. Measure the exact height of the window from top edge of molding to bottom edge, or total top of sill if there is one. Add 3" to allow for adequate mounting area above the window.
3. If blind extends to the floor (e.g., to cover patio door), measure as in step two. Then add 3" to allow for adequate mounting area above the window and deduct $\frac{1}{2}$ " for clearance so the vanes do not touch the floor.
4. The factory makes NO allowances on outside mount.

Cordless Faux Wood Blinds

Product Detail

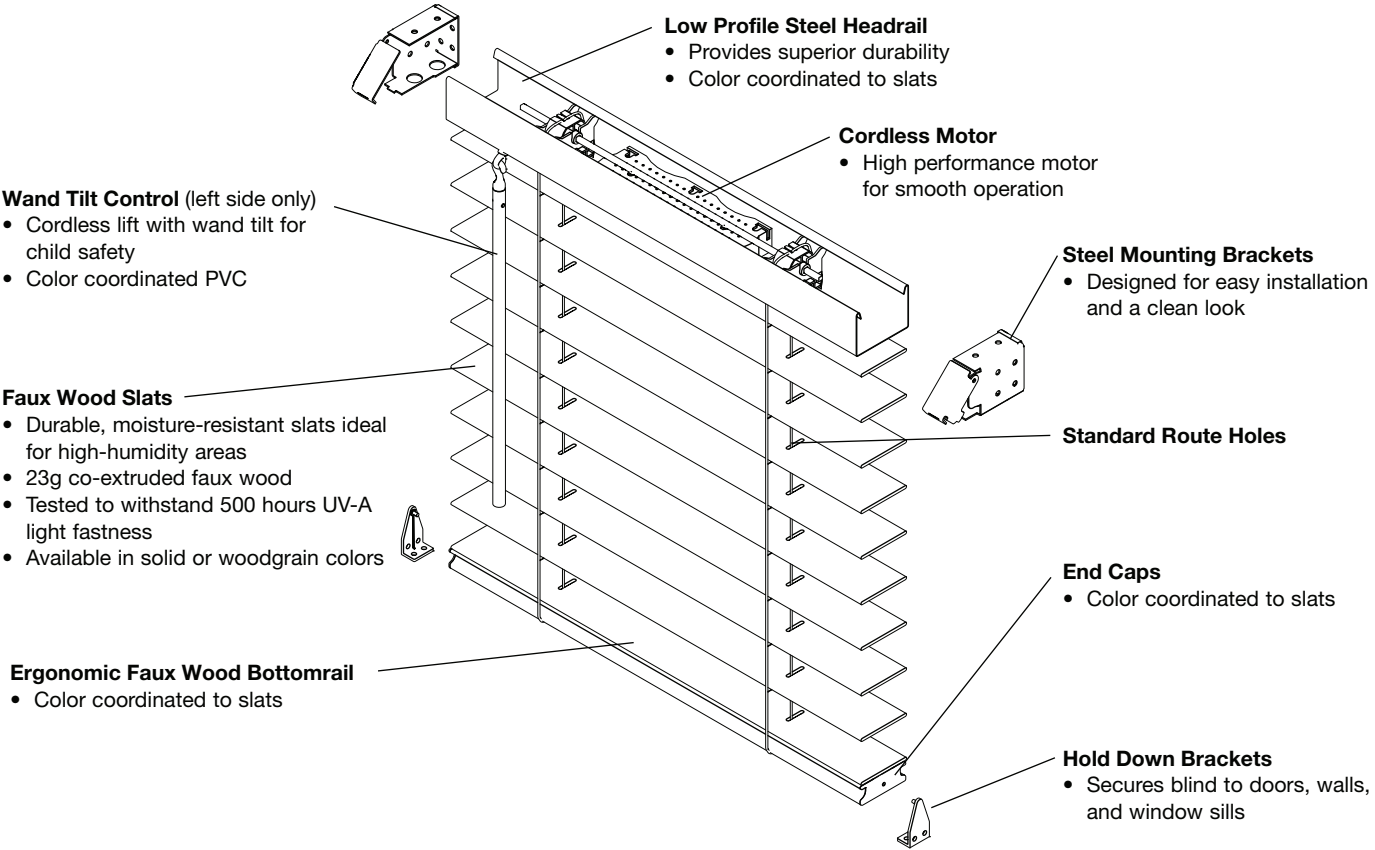

Size Considerations

Minimum Blind Width (inches)	15½ inside mount* 15 outside mount
Maximum Blind Width (inches)	72½ inside mount* 72 outside mount
Minimum Blind Height (inches)	24
Maximum Blind Height (inches)	72

*½" deduction is taken on all inside mount blinds.

NOTE: There is a 1" length tolerance. There may be extra slats that rest on the bottomrail.


Finished Blind Width (inches)	Number of Ladders	Number of Lifts
15 to 18	2	2
18½ to 24	2	2
24½ to 30	3	2
30½ to 36	3	2
36½ to 42	4	4
42½ to 48	4	4
48½ to 54	5	4
54½ to 60	5	4
60½ to 66	6	4
66½ to 72	6	4

NOTE: On all inside mount blinds, take deduction BEFORE determining ladder and lift quantity.

NOTE: Orders of 50 blinds or more may have an extended lead time. Please allow 48 hours for lead time confirmation.

Cordless Vinyl Blinds

Product Detail

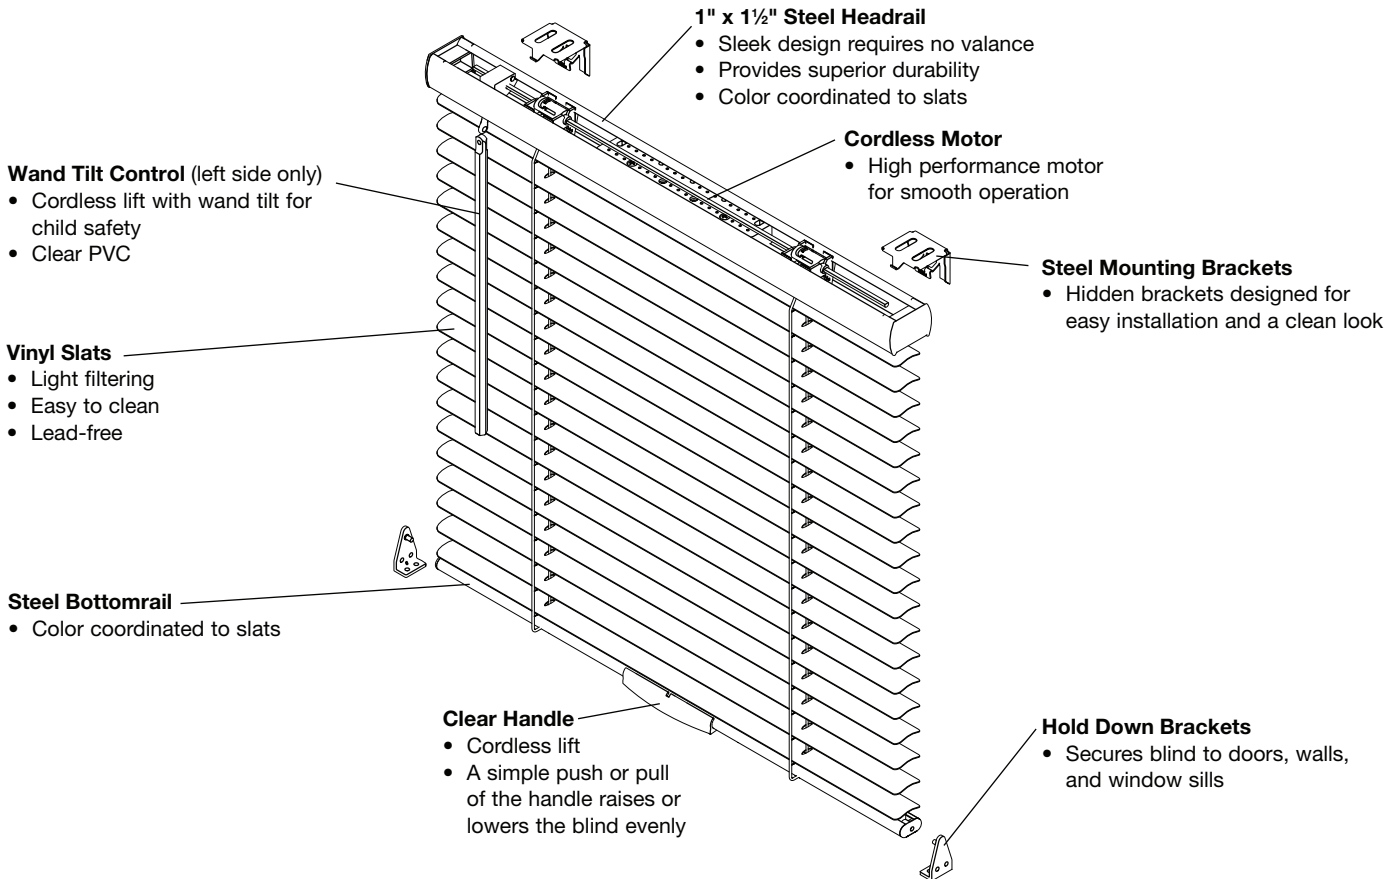

Size Considerations

Minimum Blind Width (inches)	16½ inside mount* 16 outside mount
Maximum Blind Width (inches)	72½ inside mount* 72 outside mount
Minimum Blind Height (inches)	24
Maximum Blind Height (inches)	84

*½" deduction is taken on all inside mount blinds.

NOTE: There is a 1" length tolerance. There may be extra slats that rest on the bottomrail.


Finished Blind Width (inches)	Number of Ladders	Number of Lifts
16 to 23	2	2
23½ to 30	2	2
30½ to 37	3	2
37½ to 44	3	2
44½ to 51	4	4
51½ to 58	4	4
58½ to 65	5	3
65½ to 72	5	3

NOTE: On all inside mount blinds, take deduction BEFORE determining ladder and lift quantity.

NOTE: Orders of 50 blinds or more may have an extended lead time. Please allow 48 hours for lead time confirmation.

Cordless Cellular Shades

Product Detail

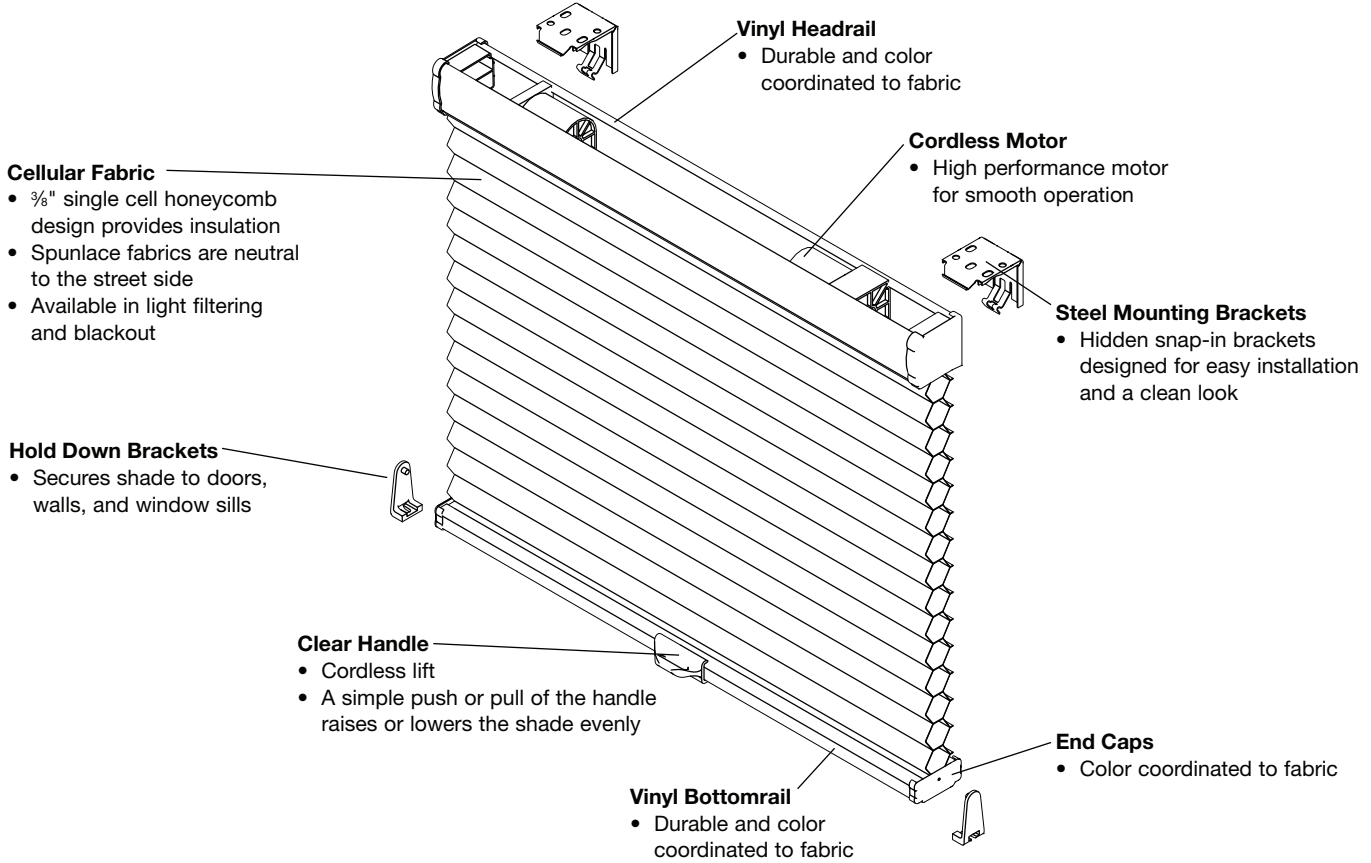

Size Considerations

Minimum Shade Width (inches)	18½ inside mount* 18 outside mount
Maximum Shade Width (inches)	72½ inside mount* 72 outside mount
Shade Height (inches)	48, 60, and 72

*½" deduction is taken on all inside mount blinds.

NOTE: Shades are available in three heights, and length will not be adjusted.

NOTE: Orders of 50 blinds or more may have an extended lead time. Please allow 48 hours for lead time confirmation.

Vertical Blinds

Product Detail

1½" x 1¼" Steel Headrail

- Reversible white painted steel headrail provides mounting flexibility and durability

3½" Vinyl Vanes

- Easy to clean
- Available in four different styles

4⅜" Extension Bracket

- Available at no charge

Valance

- Channel panel valance with 5½" returns included

Wand Draw Control

- One way, right or left
- 33" in length for all blind sizes
- Cordless control for child safety

Size Considerations

Minimum Blind Width (inches)	13¼ inside mount* 13 outside mount
Maximum Blind Width (inches)	120¼ inside mount* 120 outside mount
Minimum Blind Height (inches)	6
Maximum Blind Height (inches)	104

*¼" deduction is taken on all inside mount blinds.

NOTE: All measurements are exact.

Number of Vanes	Clear Opening (inches)	Finished Blind Width (inches)
5	12	16
6	14¾	19½
7	17¾	22¼
8	20	25¾
9	22½	28½
10	25¼	31¾
11	28¼	34¾
12	30¾	38
13	33¼	41½
14	35¾	44¼
15	38½	47¾
16	41½	50½
17	43¾	53¾
18	46¾	56¾
19	49	59¾
20	51¾	63
21	54¾	66½

Number of Vanes	Clear Opening (inches)	Finished Blind Width (inches)
22	57	69¼
23	59¾	72¾
24	62¼	75¾
25	65¼	79
26	68	82¼
27	69¾	85¼
28	72¾	88¾
29	74¾	92
30	77¼	94¼
31	79¾	98½
32	82¼	101¾
33	85	104¾
34	89¾	108
35	92¾	111¼
36	95¾	114½
37	98¾	117¾
38	99¾	120

NOTE: Orders of 50 blinds or more may have an extended lead time. Please allow 48 hours for lead time confirmation.

(07/19) 19-12229|S19-11851