

HORIZONTAL VINYL BLINDS

Product Information Guide

Features and Size Considerations

Summary	2
Collection Properties and Light Control	2
Size Considerations	2
Depth Requirements for Inside Mount	2

Options

Summary	3
Control Options	3
Multiple Blinds on One Headrail	4
Control Length Chart Wands	4
Cut-Out Blinds	4
Bay and Corner Windows	5
Valance Styles	6
How to Measure and Order Valances	6
How to Order Valance Returns	6

General Information

Slat Count Table: 2" Horizontal Cordless Vinyl	7
Ladder Count Table: 2" Horizontal Cordless Vinyl	7
2" Horizontal Vinyl Cordless Product Detail	8

PLEASE NOTE:

Photos and illustrations are for inspiration only.
Not all product configurations are available in all countries.

Window blind cords are a strangulation hazard for young children. Consult your dealer or store associate for cordless products, or products with inaccessible cords. Remove this product immediately if a cord longer than 22 cm, or a loop exceeding 44 cm, becomes accessible.

VEUILLEZ NOTER :

Les photos et les illustrations ne sont offertes qu'à titre d'inspiration. Toutes les configurations de produits ne sont pas disponibles dans tous les pays.

Les cordons pour store de fenêtre représentent un risque d'étranglement pour les jeunes enfants. Consultez votre dépositaire ou un associé de magasin pour des produits sans cordon ou des produits dont les cordons ne sont pas accessibles.
Retirez ce produit immédiatement si un cordon mesurant plus de 22 cm de longueur ou une boucle dépassant 44 cm deviennent accessibles.



JUNE 2024

(06/24) 24-565650

Features and Size Considerations

Summary

Bali® Horizontal Vinyl Blinds are a classic window treatment with up-to-date colors, textures, and patterns that feature privacy, light control, durability, and ease of operation.

Features

- Durable, easy-to-clean vinyl slats
- Non-lead vinyl formulation slats for safety, durability, and light control
- Durable steel headrail (1 $\frac{5}{8}$ " x 2 $\frac{1}{4}$ ")
- Wand tilt control and cordless lift standard
- Color coordinated components for a finished look
- Available in a wide assortment of colors to suit any décor and coordinate with Bali Vertical Blinds



Collection Properties and Light Control

Collection Name	Coordinates with Verticals	Neutral to Streetside	Light Control	Flame Retardant NFPA 701
Americana	•	•	Room darkening	Yes
Buckskin	•	•	Room darkening	Yes
Dazzle	•	•	Room darkening	Yes
Foundations	•	•	Room darkening	Yes
Pembrook	•	•	Room darkening	Yes
Presidential	•	•	Room darkening	Yes
Quatico	•	•	Room darkening	Yes
Sequoia	•	•	Room darkening	Yes

Size Considerations

Minimum Blind Width	17" outside mount 17 $\frac{1}{2}$ " inside mount
Maximum Single Blind Width	84"
Maximum Width (multiple blinds on one headrail)	120"
Minimum Blind Height	24"
Maximum Blind Height	78"

Depth Requirements for Inside Mount

	 <p>Partially recessed headrail in window casing/molding</p>	 <p>Fully recessed headrail in window casing/molding</p>
Headrail Dimensions (inches)	Minimum Depth Mount (inches)	Flush with Casing (inches)
1 $\frac{5}{8}$ x 2 $\frac{1}{4}$	$\frac{3}{4}$	Without valance: 2 $\frac{5}{8}$ With standard valance: 3 $\frac{3}{16}$ With double valance: 4

Options

Summary (for surcharges and pricing, refer to price charts)

The following is a list of options for 2" horizontal vinyl blinds. All options are available in all styles and colors. See detailed descriptions on the following pages.

Control Type Options

(see price charts for pricing and/or surcharges)

- Wand tilt (standard): no charge

Blind Options—No Charge

- Bay or corner window
- Controls
 - Standard control location (tilt left)
 - Reverse control location (tilt right)
- Cut-outs (Tilt only)
- Hold down brackets
- Projection brackets (available on outside mount only)
 - 2 $\frac{3}{4}$ "
 - 4 $\frac{3}{4}$ "
- Shims
- Special wand length

Blind Options—Surcharge

(see price charts for pricing and/or surcharges)

- Double valance
- Multiple blinds on one headrail less than or equal to 84"
- Wood cornice: see cornices and valances product information guide

Control Options



Cordless Lift, Wand Tilt

- No charge
- Standard




Sky Pole

Ring Tilt


- No charge
- Optional
- Sky Pole available for a surcharge for operation of the ring tilt

Options

Multiple Blinds on One Headrail

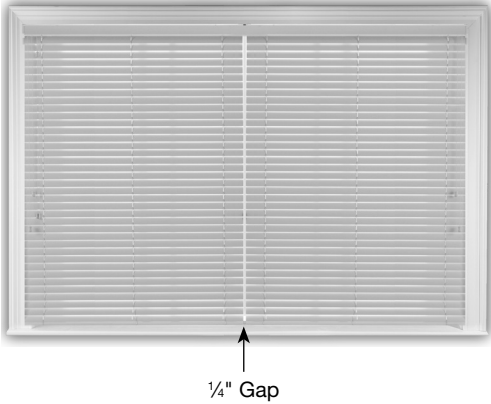

1/4" Gap

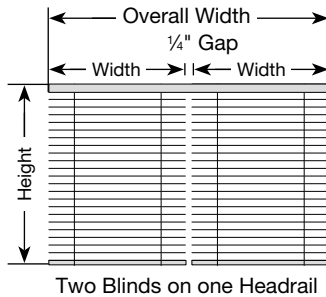

- Surcharge: blind less than or equal to 84" wide
 - Two blinds on one headrail
 - Three blinds on one headrail
 - **See price charts**
- No charge: blinds 84 $\frac{1}{16}$ " to 120" wide
- Two or three blinds can be installed on a single headrail to provide a practical treatment for larger windows or sliding patio doors
- Due to weight limitations, blinds over 84" must be manufactured as two blinds on one headrail

Maximum Overall Size for Multiple Blinds (inches)	Standard Control Locations	Gap (inches)
120 x 78	left panel (tilt left) right panel (tilt right) center panel (tilt left)	1/4

NOTE: Optional control positions may be requested.

Measuring

1. Measure overall width of the area to be covered. If space permits, an overlap of 1 $\frac{1}{2}$ " per side is recommended for outside mounts.
2. Measure the width of the area each blind is to cover. Measure and specify the left blind first, continuing to the right. Allow a minimum of 1/4" between blinds for operating clearance.
3. Total width of all blinds, plus clearance(s) must equal overall width.
4. Measure height as follows:
 - a. For windows, use standard inside or outside measuring procedures.
 - b. For patio doors, measure height within 3/4" of floor, either from ceiling or a point at least 6 $\frac{1}{2}$ " above the door frame. Check slat count table if blind is to completely clear the doorway.

Ordering


1. Specify total width of headrail.
2. Indicate each panel width separately, specify left blind first, continuing to the right.
3. Specify control positions, if other than standard.
4. Add appropriate surcharge (if less than 84").

Control Length Chart for Cords and Wands

Finished Blind Height (inches)	Wand Length (inches)
up to 36	12
36 $\frac{1}{16}$ to 60	20
60 $\frac{1}{16}$ to 70	30
70 $\frac{1}{16}$ to 78	40

NOTE: Above control lengths may not fit your control needs based on window location or operator.
Special wands may be requested at the time of ordering.

Cut-Out Blinds

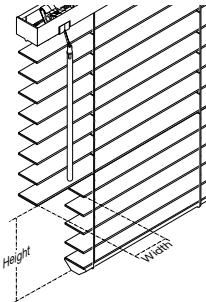

- **No charge**
- Bottom corner and side cut-outs only
- Maximum cut-out is 1" before route hole (corner and side cut-outs only)
- Cut-outs are created with slats tilted in the closed position for maximum clearance
- The cut-out height may be larger than requested due to slat placement
- Measure height from the bottom of the blind up to the desired location
- Available with no lift, tilt only





Options

Bay and Corner Windows

- Made as individual blinds to fit in bay or corner windows
- Each section will have its own control; we recommend opposite corners
- Indicate each blind with bypass or butt; bypass is the blind mounted into the corner; butt is the blind butted up to the other blind
- Must provide blind location (left and right blind)

- Slat alignment cannot be guaranteed on side by side blinds
- Manufacturer will take appropriate deductions for proper fit
- No additional charge
- Cornices are not available

NOTE: If you do not want manufacturer to take deductions DO NOT order as bay or corner.

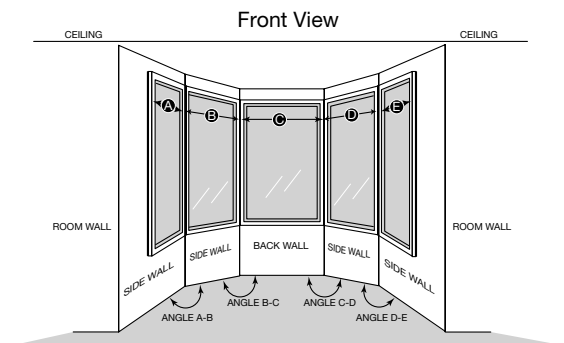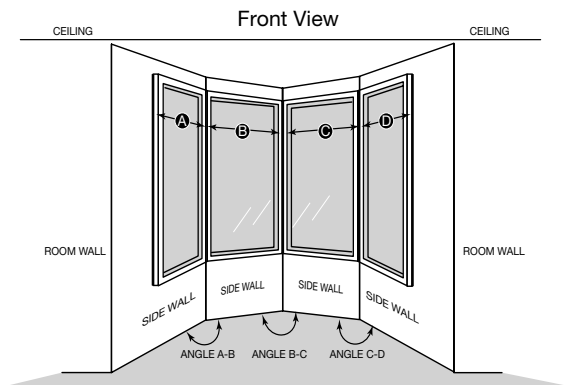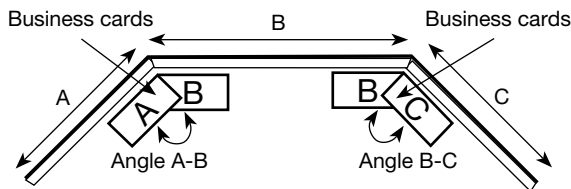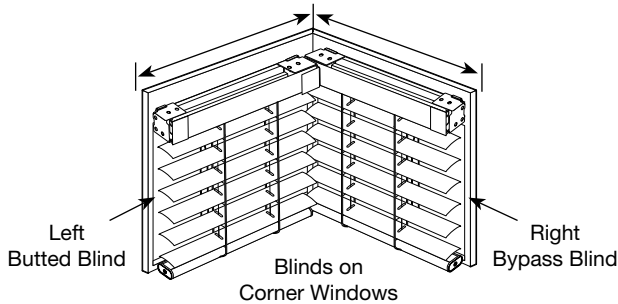

Measuring Information

Corner Window

Measure:

Width of each window from corner to the point you would like to cover.

Three-Sided Bay Window

Measure:

A and C: Width of side windows from the corners to the point you would like the blind to cover

B: Width of the center window from corner to corner

Angle A-B: Angle between windows (A) and (B)

Angle B-C: Angle between windows (B) and (C)

Four-Sided Bay Window

Measure:

A and D: Width of side windows from the corners to the point you would like the blind to cover

B and C: Width of each window from corner to corner

Angle A-B: Angle between windows (A) and (B)

Angle B-C: Angle between windows (B) and (C)

Angle C-D: Angle between windows (C) and (D)

Five-Sided Bay Window

Measure:

A and E: Width of side windows from the corners to the point you would like the blind to cover

B, C, and D: Width of each center window from corner to corner

Angle A-B: Angle between windows (A) and (B)

Angle B-C: Angle between windows (B) and (C)


Angle C-D: Angle between windows (C) and (D)

Angle D-E: Angle between windows (D) and (E)

NOTE: Measure bay angle using protractor or angle finder, or use two business cards in bay corner as illustrated above trace angle onto paper and fax to customer service.

Options

Valance Styles

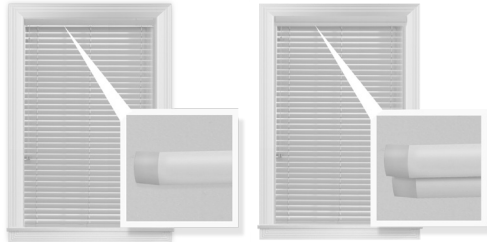

Standard Valance

Double Valance

Standard Valance

- No charge
- 2" single slat valance is standard and provides a finished look

Double Valance



- Surcharge option
- Provides better headrail coverage for a more upscale look
- Height of double valance is 3"

Valance Type	Tilt Type	Return Length (inches)	Full Recess Depth (inches)	Inside Mount (inches)	Outside Mount (inches)
Standard	All	3 ⁵ / ₁₆	3 ⁵ / ₁₆	120 FBW	120 FBW
Double	All	3 ¹⁵ / ₁₆	4	120 FBW	120 FBW

How to Measure and Order Valances

The appropriate valance (inside or outside mount) will be supplied with your blind order. For a more custom look, valance and returns may be special ordered.

NOTE: Valances with returns are measured and cut from the INSIDE (BACKSIDE) of the valance to ensure the most accurate fit when installed over the headrail or window frame

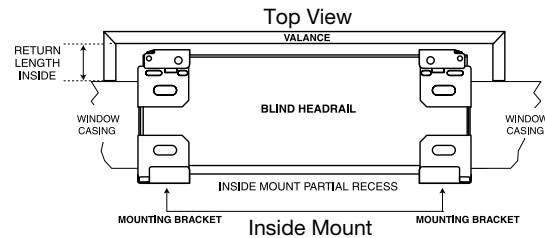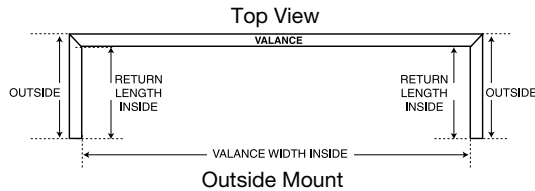

Outside Mount Valance

It is typically required that the valance is entered into the system and manufactured WITH returns. However, outside mount valances are available WITHOUT returns if needed.

NOTE: FAXED orders for outside mount valances will AUTOMATICALLY be entered with returns unless otherwise specified. Certain accounts that enter orders electronically WILL BE REQUIRED TO SELECT WITH OR WITHOUT RETURNS in their system during entry.

Inside Mount Valance


It is typically required for the valance to be entered in the system and manufactured WITHOUT returns.

NOTE: Valance without returns have ends that are cut straight and look best when the blind and valance are fully recessed into the window casing. However, inside mount valances are available WITH returns for blinds that are unable to be fully recessed into the window casing.

ADDITIONAL ORDERING INFORMATION:

If projection brackets are requested at the time of order for a valance with returns, longer returns will be automatically sent. Please state at the time of order if the valance and return measurements are for the EXACT size required so that no additions or deductions are made.

How to Order Valance Returns

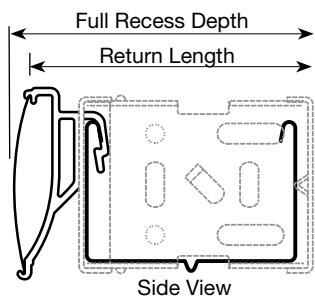

- Full recess is from front of valance to wall.
- Return length is from back of the valance corner to wall.

Determining a special return length for INSIDE MOUNT blinds not fully recessed:

1. Using the chart above, locate the standard return length by selecting your valance type.
2. Measure the recessed space (depth) of your window casing.
3. Subtract the recessed space measurement from the standard return length.
4. The difference will be the Special Return Length you will need to order for your INSIDE MOUNT valances.

NOTE: Minimum return length is 1 3/4".

General Information

Slat Count Table: 2" Horizontal Vinyl Cordless

Finished Blind Height (inches)	Number of Slats	Finished Stack Height (inches)
10	6	3 $\frac{3}{4}$
11	6	
12	7	
13	7	
14	8	
15	8	4 $\frac{1}{16}$
16	9	
17	10	
18	10	
19	11	
20	11	4 $\frac{5}{16}$
21	12	
22	12	
23	13	
24	14	
25	14	4 $\frac{11}{16}$
26	15	
27	15	
28	16	
29	16	
30	17	5
31	18	

Finished Blind Height (inches)	Number of Slats	Finished Stack Height (inches)
32	18	
33	19	
34	19	
35	20	5
36	21	
37	21	
38	22	
39	22	
40	23	5
41	23	
42	24	
43	25	
44	25	
45	26	5 $\frac{7}{16}$
46	26	
47	27	
48	27	
49	28	
50	29	6 $\frac{3}{16}$
51	29	
52	30	
53	30	

Finished Blind Height (inches)	Number of Slats	Finished Stack Height (inches)
54	31	
55	31	6 $\frac{1}{2}$
56	32	
57	33	
58	33	
59	34	
60	34	6 $\frac{3}{4}$
61	35	
62	36	
63	36	
64	37	
65	37	7 $\frac{1}{16}$
66	38	
67	38	
68	39	
69	40	
70	40	7 $\frac{5}{16}$
71	41	
72	41	
73	42	
74	42	
75	43	7 $\frac{11}{16}$
76	44	
77	44	
78	45	

NOTE: Finished heights include headrail and bottomrail.

Ladder Count Table: 2" Horizontal Vinyl Cordless

Standard or Reversed Controls

Finished Blind Width (inches)	Number of Ladders
9 to 26	2
26 $\frac{7}{16}$ to 44	3
44 $\frac{7}{16}$ to 62	4
62 $\frac{7}{16}$ to 84	5

Inside Mount: Order width minus $\frac{1}{2}$ "


Example:

30" width inside mount blind minus $\frac{1}{2}$ " deduction equals 29 $\frac{1}{2}$ " finished blind width

Outside Mount: No deduction

General Information

2" Horizontal Vinyl Cordless Product Detail

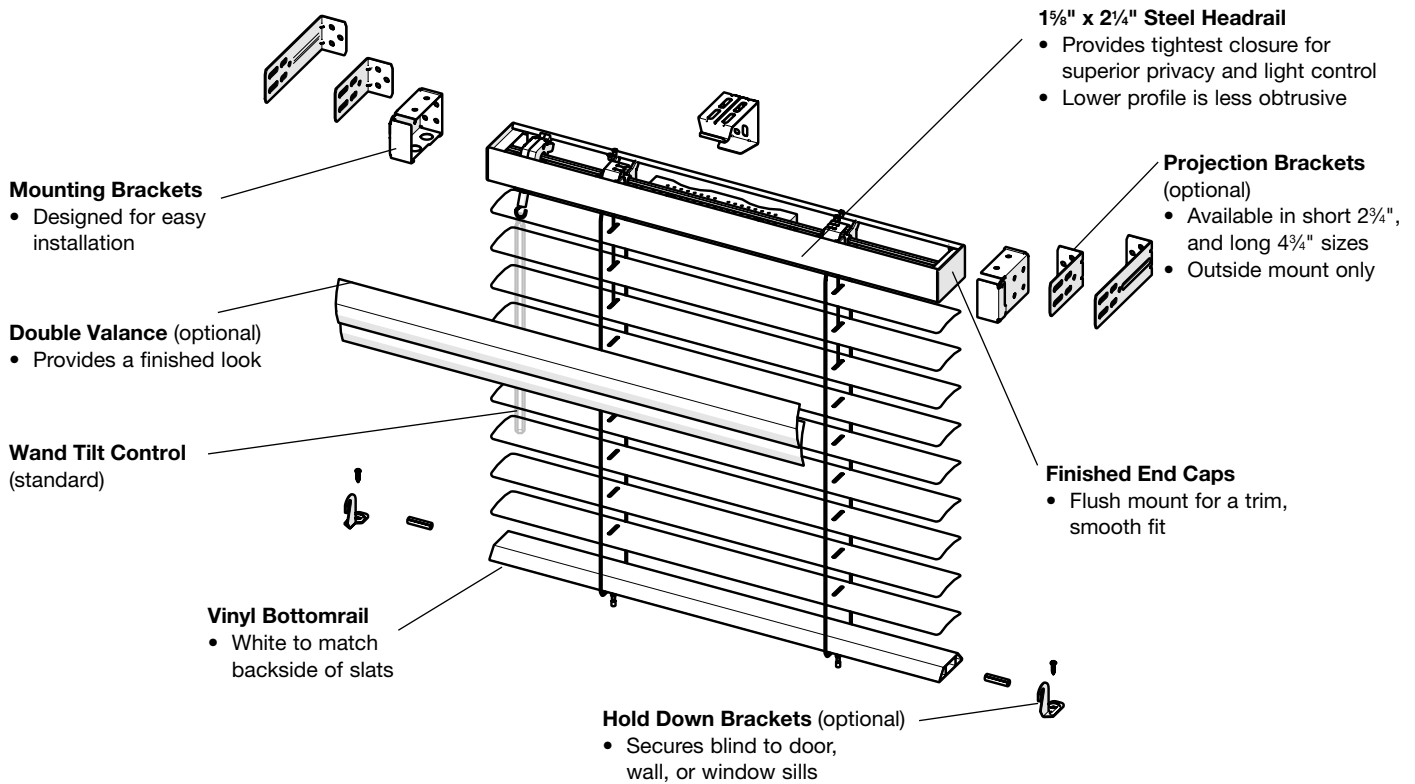

Bali is a brand of Springs Window Fashions, the Best Experience Company

Bali and the Bali logo are registered trademarks of Springs Window Fashions, LLC.

(06/24) 24-565650