

Bali® Horizontal Vinyl Blinds



Product Information Guide and Price List for **2" Horizontal Vinyl Blinds** United States **March 2019**

Features and Size Considerations

Summary

Bali® Horizontal Vinyl Blinds are a classic window treatment with up-to-date colors, textures, and patterns that feature privacy, light control, durability, and ease of operation.

Features

- Durable, easy-to-clean vinyl slats
- Non-lead vinyl formulation slats for safety, durability, and light control
- SureTight® low profile steel headrail provides superior lightblocking properties
- Wand tilt control and crash-proof cord lock standard
- Color coordinated components for a finished look
- Available in a wide assortment of colors to suit any décor and coordinate with Bali Vertical Blinds



Collection Properties and Light Control

Collection Name	Price Chart	Coordinates with Verticals	Neutral to Streetside	Light Control	Flame Retardant NFPA 701
Americana	B	•	•	Room darkening	Yes
Buckskin	C	•	•	Room darkening	Yes
Dazzle	B	•	•	Room darkening	Yes
Foundations	A	•	•	Room darkening	Yes
Pembrook	C	•	•	Room darkening	Yes
Presidential	C	•	•	Room darkening	Yes
Quatico	B	•	•	Room darkening	Yes
Sequoia	B	•	•	Room darkening	Yes

Size Considerations

Minimum Blind Width	9" outside mount 9½" inside mount
Minimum Blind Width (exceptions)	9" to 11½" are center tilt only 16½" minimum for same side controls
Maximum Single Blind Width	84"
Maximum Width (multiple blinds on one headrail)	120"
Minimum Blind Height	12"
Maximum Blind Height	108"

Depth Requirements for Inside Mount

Headrail Dimensions (inches)	 Partially recessed headrail in window casing/molding Minimum Depth Mount (inches)	 Fully recessed headrail in window casing/molding Flush with Casing (inches)
1⅝ x 2¼	¾	Without valance: 2⅝ With standard valance: 3⅝ With double valance: 4

Options

Summary (for surcharges and pricing, refer to pricing section)

The following is a list of options for 2" horizontal vinyl blinds. All options are available in all styles and colors. See detailed descriptions on the following pages.

Control Type Options

(see price charts for pricing and/or surcharges)

- Wand tilt (standard): no charge
- Cord tilt (optional): no charge
- Ring tilt and ring lift: no charge

Blind Options—No Charge

- Bay or corner window
- Standard clear cord cleats
- Controls
 - Standard control location (tilt left, lift right)
 - Same side control location (tilt right, lift right or tilt left, lift left)
 - Reverse control location (tilt right, lift left)
 - Cut-outs
- Hold down brackets
- Projection brackets (available on outside mount only)
 - 2¾"
 - 4¾"
- Shims
- Special control length

Blind Options—Surcharge

(see price charts for pricing and/or surcharges)

- Cloth tapes
 - 1"
 - 1½"
- Double valance
- Multiple blinds on one headrail less than or equal to 84"
- Sky pole
 - 3 feet to 6½ feet
 - 5 feet to 9½ feet
- Wood cornice: see cornices and valances product information guide and price list
- NoHoles™

Control Options



Wand Tilt

- No charge
- Standard



Cord Tilt

- No charge
- Optional



Ring Tilt


- No charge
- Optional
- Sky pole available for a surcharge for operation of the ring tilt



Sky Pole

Options

Multiple Blinds on One Headrail



- Surcharge: blind less than or equal to 84"
 - Two blinds on one headrail
 - **See price charts and options pricing**
- No charge: blinds 84 $\frac{1}{16}$ " to 120"
- Two blinds can be installed on a single headrail to provide a practical treatment for larger windows or sliding patio doors
- Due to weight limitations, blinds over 84" must be manufactured as two blinds on one headrail
- For two-on-one-headrail, lift cords cannot be located towards the center of the blind

Maximum Overall Size for Multiple Blinds (inches)	Standard Control Locations	Gap (inches)
108 x 120	Two-on-one: left panel (tilt and lift left) right panel (tilt and lift right)	$\frac{1}{4}$

NOTE: Optional control positions may be requested.

Measuring

1. Measure overall width of the area to be covered. If space permits, an overlap of 1 $\frac{1}{2}$ " per side is recommended for outside mounts.
2. Measure the width of the area each blind is to cover. Measure and specify the left blind first, continuing to the right. Allow a minimum of $\frac{1}{4}$ " between blinds for operating clearance.
3. Total width of all blinds, plus clearance(s) must equal overall width.
4. Measure height as follows:
 - a. For windows, use standard inside or outside measuring procedures.
 - b. For patio doors, measure height within $\frac{3}{4}$ " of floor, either from ceiling or a point at least 6 $\frac{1}{2}$ " above the door frame. Check slat count table if blind is to completely clear the doorway.

Ordering

1. Indicate whether two or three blinds are to be mounted on one headrail.
2. Specify total width of headrail.
3. Indicate each panel width separately, specify left blind first, continuing to the right.
4. Specify control positions, if other than standard.
5. Add appropriate surcharge (if less than 84").


Control Length Chart for Cords and Wands

Finished Blind Height (inches)	Wand Length (inches)	Cord Length
up to 36	12	$\frac{1}{3}$ of blind height
36 $\frac{1}{16}$ to 60	20	
60 $\frac{1}{16}$ to 70	30	
70 $\frac{1}{16}$ to 80	40	
80 $\frac{1}{16}$ to 90	50	
90 $\frac{1}{16}$ to 100	60	
100 $\frac{1}{16}$ to 120	72	

NOTE: Above control lengths may not fit your control needs based on window location or operator.
Special cords and wands may be requested at the time of ordering.

Options


Cloth Tapes



- For surcharge, see options pricing
- Not available with NoHoles™
- Colors available:


1" Solid Tapes		1½" Solid Tapes	
Beige	1011	Beige	2011
Black	1033	Black	2033
Cocoa	1297	Chocolate	2353
Duck White	1136	Cocoa	2297
Toffee	1296	Dark Grey	2857
		Duck White	2136
		Light Beige	2137
		Light Grey	2861
		Maroon	2360
		Moss	2500
		Navy	2369
		Pecan	2403
		Taupe	2659
		Toffee	2296
		Wheat	2710
		White	2005
		White Smoke	2617

Cut-Out Blinds



- **No charge**
- Bottom corner and side cut-outs only
- Maximum cut-out is 1" before route hole or NoHoles notch (corner and side cut-outs only)
- Cut-outs are created with slats tilted in the closed position for maximum clearance
- The cut-out height may be larger than requested due to slat placement
- Measure height from the bottom of the blind up to the desired location

NoHoles





- **For surcharge, see options pricing**
- Provides maximum privacy and light control
- The design of the NoHoles option eliminates route holes, providing additional privacy and the best available light control
- Cleaning is simplified by sliding the NoHoles slats out and wiping clean, or keep the slats in place and vacuuming using a soft brush attachment
- Not available on blinds with cloth tape option

Options

Bay and Corner Windows

- Made as individual blinds to fit in bay or corner windows
 - Each section will have its own control; we recommend opposite corners
 - Indicate each blind with bypass or butt; bypass is the blind mounted into the corner; butt is the blind butted up to the other blind
 - Must provide blind location (left and right blind)
 - Slat alignment cannot be guaranteed on side by side blinds
 - Manufacturer will take appropriate deductions for proper fit
 - No additional charge
 - Cornices are not available
- NOTE:** If you do not want manufacturer to take deductions DO NOT order as bay or corner.

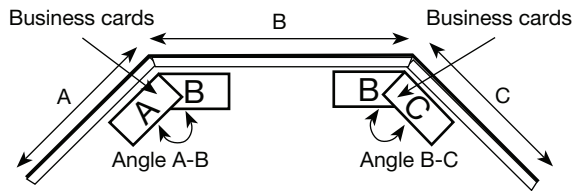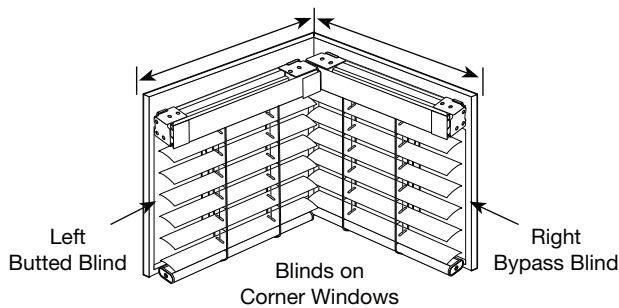

Measuring Information

Corner Window

Measure:

Width of each window from corner to the point you would like to cover.

Three-Sided Bay Window

Measure:

A and C: Width of side windows from the corners to the point you would like the blind to cover

B: Width of the center window from corner to corner

Angle A-B: Angle between windows (A) and (B)

Angle B-C: Angle between windows (B) and (C)

Four-Sided Bay Window

Measure:

A and D: Width of side windows from the corners to the point you would like the blind to cover

B and C: Width of each window from corner to corner

Angle A-B: Angle between windows (A) and (B)

Angle B-C: Angle between windows (B) and (C)

Angle C-D: Angle between windows (C) and (D)

Five-Sided Bay Window

Measure:

A and E: Width of side windows from the corners to the point you would like the blind to cover

B, C, and D: Width of each center window from corner to corner



Angle A-B: Angle between windows (A) and (B)

Angle B-C: Angle between windows (B) and (C)

Angle C-D: Angle between windows (C) and (D)


Angle D-E: Angle between windows (D) and (E)

NOTE: Measure bay angle using protractor or angle finder, or use two business cards in bay corner as illustrated above trace angle onto paper and fax to customer service.

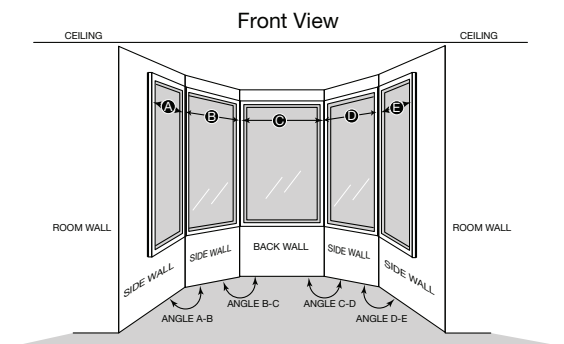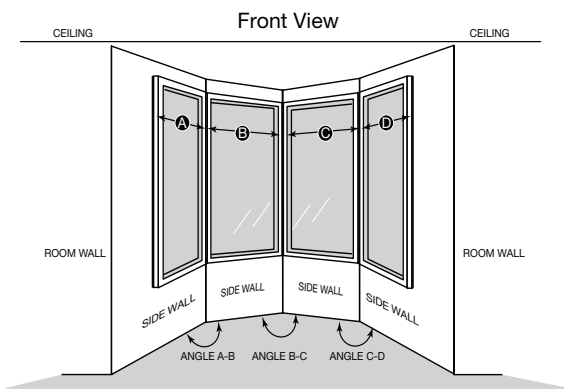

Options

Valance Styles

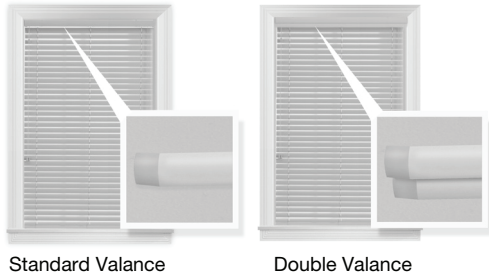

Standard Valance

- No charge
- 2" single slat valance is standard and provides a finished look

Double Valance


- Surcharge option
- Provides better headrail coverage for a more upscale look
- Height of double valance is 3"

Valance Type	Tilt Type	Return Length (inches)	Full Recess Depth (inches)	Inside Mount (inches)	Outside Mount (inches)
Standard	All	3 $\frac{5}{16}$	3 $\frac{5}{16}$	120 FBW	120 FBW
Double	All	3 $\frac{15}{16}$	4	120 FBW	120 FBW

How to Measure and Order Valances

The appropriate valance (inside or outside mount) will be supplied with your blind order. For a more custom look, valance and returns may be special ordered.

NOTE: Valances with returns are measured and cut from the INSIDE (BACKSIDE) of the valance to ensure the most accurate fit when installed over the headrail or window frame

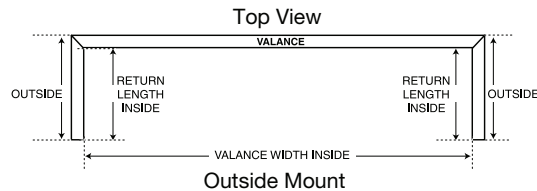


Outside Mount Valance

It is typically required that the valance is entered into the system and manufactured WITH returns. However, outside mount valances are available WITHOUT returns if needed.

NOTE: FAXED orders for outside mount valances will AUTOMATICALLY be entered with returns unless otherwise specified. Certain accounts that enter orders electronically WILL BE REQUIRED TO SELECT WITH OR WITHOUT RETURNS in their system during entry.

ADDITIONAL ORDERING INFORMATION:

If projection brackets are requested at the time of order for a valance with returns, longer returns will be automatically sent. Please state at the time of order if the valance and return measurements are for the EXACT size required so that no additions or deductions are made.

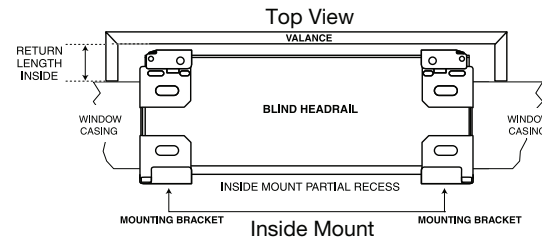


Inside Mount Valance

It is typically required for the valance to be entered in the system and manufactured WITHOUT returns.

NOTE: Valance without returns have ends that are cut straight and look best when the blind and valance are fully recessed into the window casing. However, inside mount valances are available WITH returns for blinds that are unable to be fully recessed into the window casing.

How to Order Valance Returns



- Full recess is from front of valance to wall.
- Return length is from back of the valance corner to wall.

Determining a special return length for INSIDE MOUNT blinds not fully recessed:

1. Using the chart above, locate the standard return length by selecting your blind type, valance type and tilt type.
2. Measure the recessed space (depth) of your window casing.
3. Subtract the recessed space measurement from the standard return length.
4. The difference will be the Special Return Length you will need to order for your INSIDE MOUNT valances.

NOTE: Minimum return length is 1".

General Information

Slat Count Table: 2" Horizontal Vinyl

Finished Blind Height (inches)	Number of Slats	Finished Stack Height (inches)	Finished Blind Height (inches)	Number of Slats	Finished Stack Height (inches)	Finished Blind Height (inches)	Number of Slats	Finished Stack Height (inches)
10	6	3 $\frac{3}{4}$	43	25		76	44	
11	6		44	25		77	44	
12	7		45	26	5 $\frac{5}{8}$	78	45	
13	7		46	26		79	45	
14	8		47	27		80	46	8
15	8	4 $\frac{1}{8}$	48	27		81	46	
16	9		49	28		82	47	
17	10		50	29	6 $\frac{1}{8}$	83	48	
18	10		51	29		84	48	
19	11		52	30		85	49	8 $\frac{1}{4}$
20	11	4 $\frac{3}{8}$	53	30		86	49	
21	12		54	31		87	50	
22	12		55	31	6 $\frac{1}{2}$	88	51	
23	13		56	32		89	51	
24	14		57	33		90	52	8 $\frac{9}{16}$
25	14	4 $\frac{11}{16}$	58	33		91	52	
26	15		59	34		92	53	
27	15		60	34	6 $\frac{3}{4}$	93	53	
28	16		61	35		94	54	
29	16		62	36		95	55	8 $\frac{7}{8}$
30	17	5	63	36		96	55	
31	18		64	37		97	56	
32	18		65	37	7 $\frac{1}{8}$	98	56	
33	19		66	38		99	57	
34	19		67	38		100	57	9 $\frac{3}{16}$
35	20	5	68	39		101	58	
36	21		69	40		102	59	
37	21		70	40	7 $\frac{5}{8}$	103	59	
38	22		71	41		104	60	
39	22		72	41		105	60	9 $\frac{1}{2}$
40	23	5	73	42		106	61	
41	23		74	42		107	62	
42	24		75	43	7 $\frac{11}{16}$	108	62	

NOTE: Finished heights include headrail and bottomrail.

Ladder Count Table: 2" Horizontal Vinyl

Standard or Reversed Controls

Finished Blind Width (inches)	Number of Ladders	Number of Lifts	Number of NoHoles™ Lifts
9 to 26	2	2	4
26 $\frac{1}{16}$ to 44	3	3	6
44 $\frac{1}{16}$ to 62	4	4	8
62 $\frac{1}{16}$ to 84	5	5	10

Same Side Controls

Finished Blind Width (inches)	Number of Ladders	Number of Lifts	Number of NoHole Lifts
16 $\frac{1}{16}$ to 30	2	2	4
30 $\frac{1}{16}$ to 48	3	3	6
48 $\frac{1}{16}$ to 66	4	4	8
66 $\frac{1}{16}$ to 84	5	5	10

Inside Mount: Order width minus $\frac{1}{2}$ "

Example:


30" width inside mount blind minus $\frac{1}{2}$ " deduction equals
29 $\frac{1}{2}$ " finished blind width

Outside Mount: No deduction


NOTE: Blinds with two lift cords will have two clear plastic cord stop beads located approximately 2" below the headrail. Cords will continue down, each ending in a tassel. Blinds with three or more lift cords will have cords joined together with a tassel approximately 2" below the headrail. Two individual cords will continue down each ending in a tassel.

General Information


2" Horizontal Vinyl Product Detail

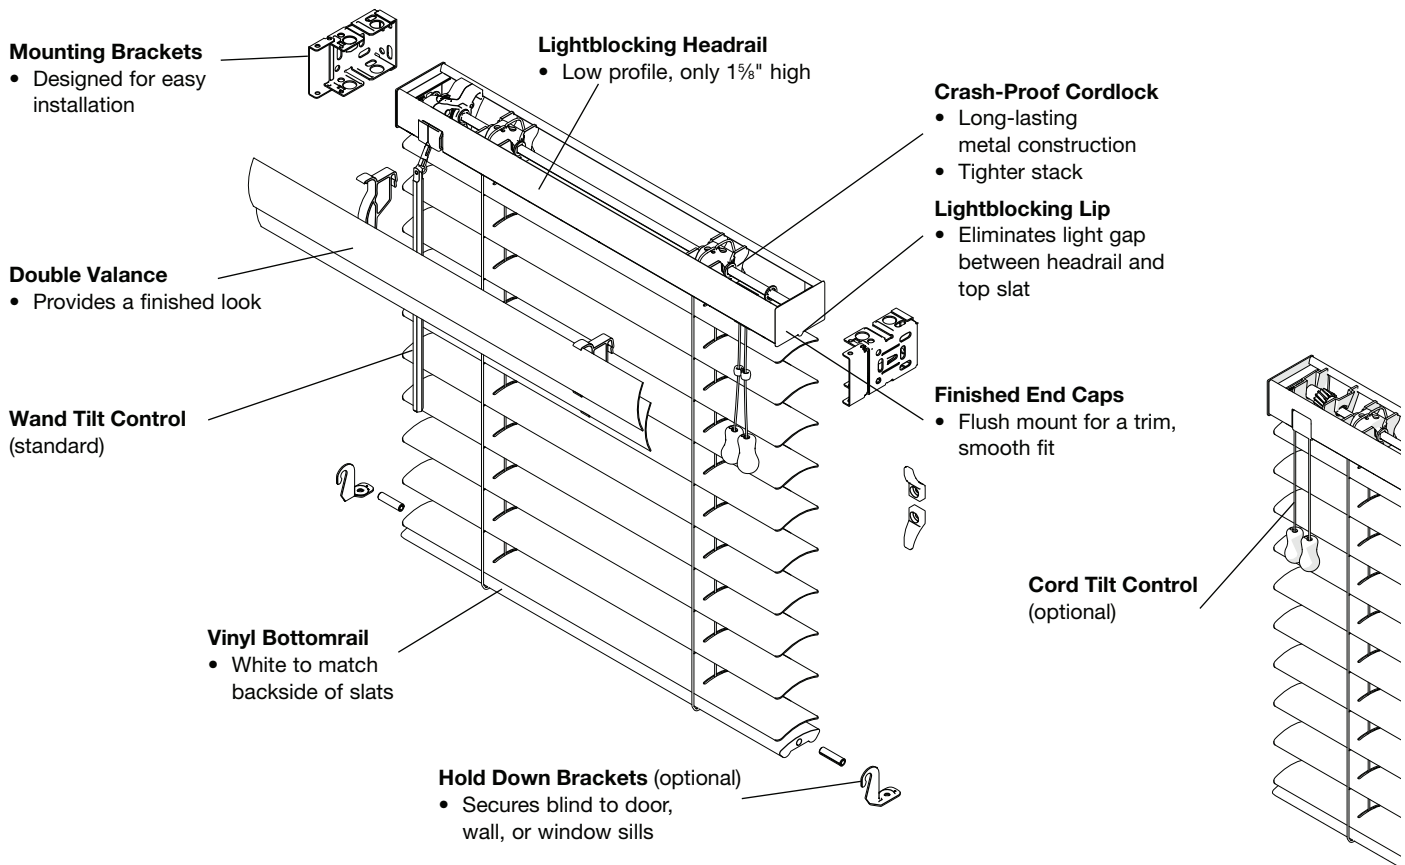

Cord Management Options



NoHoles™

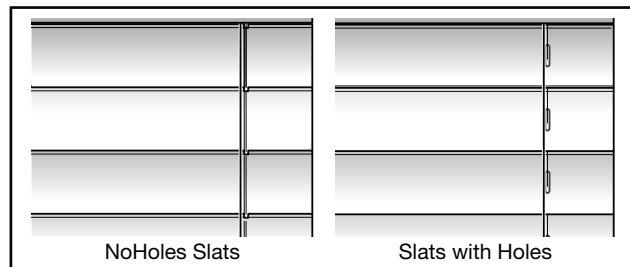

Cleaning Instructions

Occasional light vacuuming with a brush attachment should keep blinds clean. More severe soiling can be removed with a soft cloth using a mild detergent and water solution.



(03/19) 19-11135|S18-9657