


# RECTANGULAR CONFIGURATION SPECIFICATIONS

NOTE: Use metal tape measure for all measurements. Measures to 1/8 inch.


## CONTINUOUS CORD LOOP SYSTEM

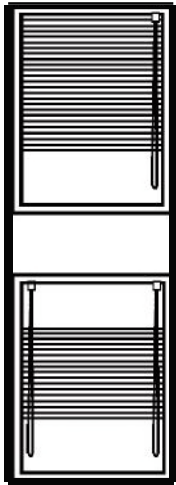

### Uses steel snap-in brackets.

Continuous cord loop system easily lifts any shade – even large or hard-to-reach – and stops the shade exactly where you want. No more tangled cords!

All continuous cord loop shades can be ordered with the fabric covered headrail and bottomrail **for a surcharge**, or with the color coordinated non-wrapped rails at **no additional charge**. **Must be specified** when order is placed.



SHADE HEIGHT	CORD LOOP DROP
up to 18"	18" loop
18" to 42"	24" loop
42-1/8" - 54"	36" loop
54-1/8" - 72"	48" loop
72-1/8" - 90"	60" loop
90-1/8" - 110"	72" loop
110-1/8" - 130"	96" loop
130-1/8" - 144"	120" loop

## FINISHED DIMENSIONS – STANDARD

Adjustments are taken from ordered dimensions.

Inside (IB) Mounts	SoftStyle	2" Hybrid Pleat*
Headrail unit	- 1/4"	- 1/4"
Shade height	ordered height	ordered height
Fabric width	- 3/8"	- 5/8"
<b>End (EB) Mounts</b>		
Headrail unit	- 1/2"	- 1/2"
Shade height	ordered height	ordered height
Fabric width	- 5/8"	- 7/8"
<b>Outside (OB) Mount</b>		
Headrail unit	ordered width	ordered width
Shade height	ordered height	ordered height
Fabric width	- 1/8"	- 3/8"

\*An extra 1/4" deduction will be taken from the fabric with the Top Down/ Bottom Up option for Hybrid Pleat

NOTE: Measurements may vary +/- 1/8".

## FINISHED DIMENSIONS – 2 ON 1 MOUNTING REQUIREMENTS

Adjustments are taken from ordered dimensions.

Inside (IB) Mount	SoftStyle	2" Hybrid Pleat*
Headrail unit	- 1/4"	- 1/4"
Shade height	ordered height	ordered height
Fabric width (includes gap deduction)	- 5/8"	- 7/8"
<b>Outside (OB) Mount</b>		
Headrail unit	ordered width	ordered width
Shade height	ordered height	ordered height
Fabric width	- 1/8"	- 3/8"
<b>2 on 1 Headrail</b>		
Gap between panels	- 1/4" - 1/4"	

NOTE: Measurements may vary +/- 1/8".

CONTINUOUS CORD LOOP – SIZE STANDARDS			
	Cellular		2" Hybrid Pleat
	All Light Filtering Fabrics	All other Blackout Fabrics	Light Filtering & Blackout
Min. Width (net)*	18"	18"	18"
Max. Width	120"	120"	120"
Max. Width – End Mount	48"	48"	42"
Min. Height	12"	12"	12"
Max. Height*	120"	120"	120"
Max. Area (sq. ft.)	100	100	60

CONTINUOUS CORD LOOP TWO-ON-ONE – SIZE STANDARDS			
	Cellular		2" Hybrid Pleat
	All Light Filtering Fabrics	All Blackout Fabrics	Light Filtering & Blackout
Min. Width (per panel)	18"	18"	18"
Min. Width (overall)	36"	36"	36"
Max. Width (per panel)	100"	96"	102"
Max. Width (overall)	120"	120"	120"
Min. Height	12"	12"	12"
Max. Height	120"	120"	120"
Max. Area (sq. ft.)	83	80	60

CONTINUOUS CORD LOOP TOP-DOWN/BOTTOM-UP – SIZE STANDARDS				
	Cellular			2" Hybrid Pleat
	All Light Filtering Fabrics	Subdue Blackout (S61)	All other Blackout Fabrics	Light Filtering & Blackout
Min. Width (net)*	24"	24"	24"	24"
Max. Width	120"	120"	120"	120"
Max. Width – End Mount	48"	48"	48"	42"
Min. Height	12"	12"	12"	12"
Max. Height*	120"	120"	120"	120"
Max. Area (sq. ft.)	100	90	100	60

On top-down/bottom-up Cellular shades a fabric insert is standard (Does not apply to Hybrid Pleat). This is an extra two-cell fabric gasket attached to the top headrail and acts as a seal to eliminate light leakage between the headrail and center rail when the shade is closed.

**Right control operates the center moving rail; left control operates the bottomrail. Reverse controls are available.**

NOTE: Inside mount with hold down brackets deductions:

Headrail -1/2"

Fabric -5/8"

Bottomrail -1/2"

Use a metal tape measure for all measurements.

Inside (IB) Mount	SoftStyle	2" Hybrid Pleat*
Minimum mounting depth	3/4"	3/4"
Minimum mounting depth, flush mount:	2-1/8"	2-1/8"
<b>Outside (OB) Mount</b>		
Minimum flat vertical surface	1-1/2"	1-1/2"