


RECTANGULAR CONFIGURATION SPECIFICATIONS

NOTE: Use metal tape measure for all measurements. Measures to 1/8 inch.

CORDLESS LIFT & LOCK SYSTEM

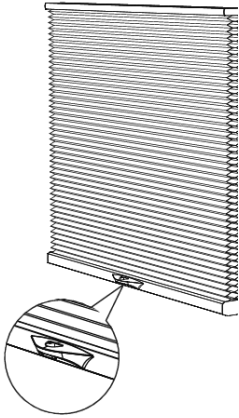

Press a button on the bottomrail to lift and lower the shade. Release the button to securely lock the shade into place.

No exposed cords on bottom up shades. Lift cords on Top-Down/Bottom-Up are on the far sides of the shade. Child-safe option.

All Cordless shades can be ordered with the fabric covered headrail and bottomrail **for a surcharge**, or with the color coordinated non -wrapped rails at **no additional charge. Must be specified** when order is placed.

Cordless Lift & Lock shades can be ordered with the Premium headrail **for a surcharge**. Premium headrail option is not available with Top-Down/Bottom-Up or TriLight.

CORDLESS LIFT & LOCK TOP-DOWN/BOTTOM-UP – SIZE STANDARDS			
	Cellular		2" Hybrid Pleat
	All Light Filtering Fabrics	All Blackout Fabrics	Light Filtering & Blackout
Min. Width (net)	16"	16"	16"
Max. Width	84"	84"	84"
Max. Width – End Mount	48"	48"	42"
Min. Height	12"	12"	12"
Max. Height	84"	84"	84"
Max Area (sq. ft.)	49	49	49

Top-Down/bottom-Up Lift & Lock shades under 42" will have one magnet in the middle.

Shades over 42" will have one magnet in the middle, and one approximately 3" from each end to provide better closure between the middle rail and top rail.

CORDLESS LIFT & LOCK – SIZE STANDARDS			
	Cellular		2" Hybrid Pleat
	All Light Filtering Fabrics	All Blackout Fabrics	Light Filtering & Blackout
Min. Width (net)	10"	10"	10"
Max. Width	84"	84"	84"
Max. Width – End Mount	48"	48"	48"
Min. Height	12"	12"	12"
Max. Height	84"	84"	84"
Max Area (sq. ft.)	49	49	49

CORDLESS LIFT & LOCK TWO-ON-ONE & THREE-ON-ONE – SIZE STANDARDS			
	Cellular		2" Hybrid Pleat
	All Light Filtering Fabrics	All Blackout Fabrics	Light Filtering & Blackout
Two-on-One			
Min. Width (net - per panel)	10"	10"	10"
Min Width (net overall)	21"	21"	21"
Max. Width (per panel)	84"	84"	84"
Max. Width (overall)	168"	168"	168"
Three-on-One			
Min. Width (net - per panel)	10"	10"	10"
Min Width (net overall)	31.75"	31.75"	31.75"
Max. Width (per panel)	84"	84"	84"
Max. Width (overall)	168"	168"	168"
Min. Height	12"	12"	12"
Max. Height	84"	84"	84"
Max Area (per panel) (sq. ft.)	49	49	49

NOTE: 2-on-1 or 3-on-1 Headrail is **not available** in Top-Down/Bottom-Up or TriLight or End Mount

FINISHED DIMENSIONS – STANDARD MOUNTING REQUIREMENTS

Adjustments are taken from ordered dimensions.

Use a metal tape measure for all measurements.

SoftStyle 2" Hybrid Pleat		
Inside (IB) Mounts		
Headrail unit (includes end caps)	– 1/4"	– 1/4"
Shade height	ordered height	ordered height
Fabric width	– 3/8"	– 3/8"
End (EB) Mounts		
Headrail unit (includes end caps)	– 1/2"	– 1/2"
Shade height	ordered height	ordered height
Fabric width	– 5/8"	– 5/8"
Outside (OB) Mount		
Headrail unit (includes end caps)	ordered width	ordered width
Shade height	ordered height	ordered height
Fabric width	– 1/8"	– 1/8"
2-on-1 & 3-on-1 Headrail		
Gap between panels	– 1/4"	– 1/4"

NOTE: Measurements may vary +/- 1/8".

Standard Headrail SoftStyle 2" Hybrid Pleat		
Inside (IB) Mount		
Minimum mounting depth	1-1/4"	1-1/4"
Minimum mounting depth, flush mount:	2-1/4"	2-1/4"
End (EB) Mount		
Minimum flat vertical surface	2"	2"
Outside (OB) Mount		
Minimum flat vertical surface	1"	1"

Premium Headrail SoftStyle 2" Hybrid Pleat		
Inside (IB) & End (EB) Mounts		
Minimum mounting depth	3/4"	3/4"
Minimum mounting depth, flush mount:	2-1/8"	2-1/8"
Outside (OB) Mount		
Minimum flat vertical surface	1-1/2"	1-1/2"

NOTE: Inside mount with hold down brackets deductions:

Headrail -1/2"

Fabric -5/8"

Bottomrail -1/2"