

CORDLESS MTM FAUX WOOD BLINDS

Product Information Guide

How to Measure

Inside Mount2

Outside Mount2

Cordless Faux Wood Blinds

Product Detail3

Size Considerations4

Options5

NOTE: For orders of 50 blinds or more, please call customer service for estimated delivery time.


How to Measure Cordless Faux Wood Blinds

Measure each window individually as size variances are common. Record width first, then height (also referred to as length) to the nearest $\frac{1}{8}$ ". Measure width from left to right, height from top to bottom, using a steel tape measure. Do not use a cloth tape.

Inside Mount

Inside mount blinds are installed inside the window casing. **See Depth Requirements for Inside Mount for more details.**


1. Measure the exact inside width of the window casing from one inside edge to the other in three different places. Record the narrowest measurement.
2. Measure the exact height in three different places from top edge of opening to top of sill. Record the longest measurement.
3. Measure the window diagonally in two places as shown. If the two diagonal dimensions are not equal, we recommend an outside mount application for optimal function and aesthetics.
4. Do not take deductions. Allowances are made at the factory to ensure a perfect fit.

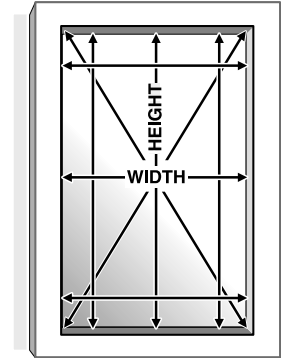

Outside Mount


Outside mount blinds are installed outside the window casing, covering an area larger than the window itself.

1. Measure the exact width to be covered. If window opening allows, overlap by at least $1\frac{1}{2}$ " on each side (3" total overlap) to ensure light control and privacy.
2. Measure the exact height to be covered, including desired overlap (typically from top edge of molding to bottom edge, or to top of sill if there is one).
3. The factory makes NO allowances on outside mount.

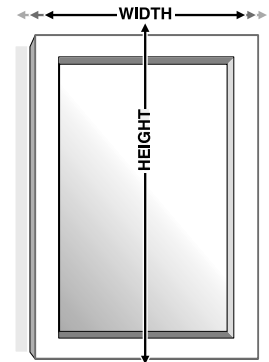

Cordless Faux Wood Blinds

Product Detail

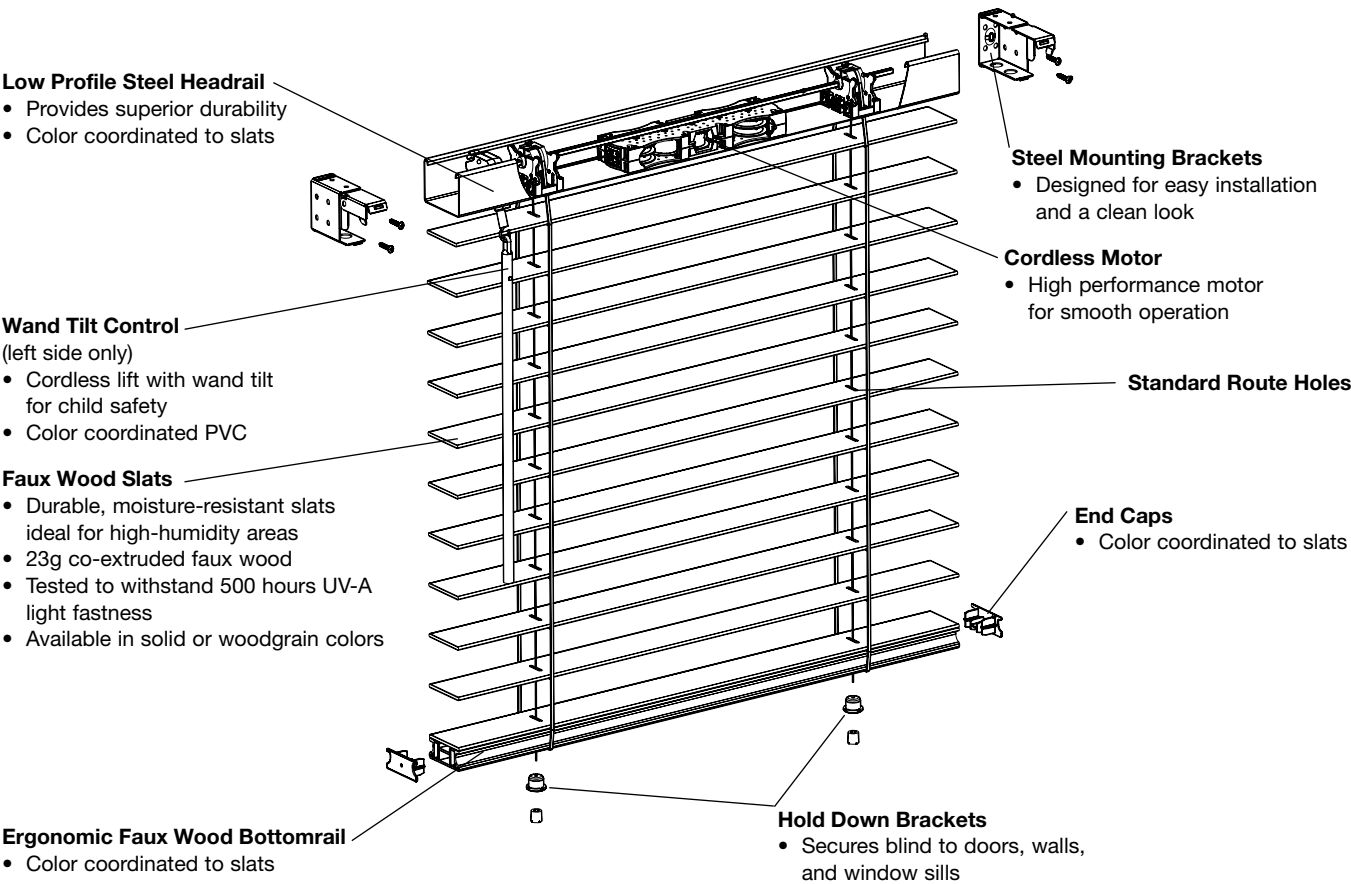

Finished Blind Width (inches)	# of Ladders	# of Lifts	# of Center Brackets
15 to 24	2	2	0
24 $\frac{1}{16}$ to 36	3	2	0
36 $\frac{1}{16}$ to 48	4	4	1
48 $\frac{1}{16}$ to 60	5	4	1
60 $\frac{1}{16}$ to 72	6	4	2 over 61"
72 $\frac{1}{16}$ to 84	7	4	3 over 73"
84 $\frac{1}{16}$ to 96	8	6	3

NOTES:

- Maximum spacing between ladders is 12".
- Standard control positions: left.
- Maximum slat width for 2" is 96".

Size Considerations

Cordless Lift Blinds



Cordless Lift Blinds

Style	Width		Height	
	Minimum (exact) (inches)	Maximum (inches)	Minimum (inches)	Maximum (inches)
	2" Faux Wood	15	96	10

Depth Requirements for Inside Mount

Blind Type	Headrail Dimensions (inches)	Minimum Depth Mount (inches)	Partially recessed headrail in window casing/molding	Fully recessed headrail in window casing/ molding
			Flush with Casing (with valance) (inches)	Wand
2" Faux Wood	1½ x 2	¾	3½	

Options

Blind Options

Blind Options	2" Faux Wood Blinds
Hold Down Brackets	•


Cordless Lift Option



- Available on 2" faux wood blinds
- A safer alternative to accessible cords that are traditionally used to operate window coverings
- Standard wand tilt eliminates all dangling cords
- Easy to use: to lower blind, pull on the bottomrail; to raise, simply guide the blind into the desired location by gently lifting the bottomrail
- Maximum wand length 29"
 - Blinds 24" or less: 20" wand
 - Blinds 25" or greater: 29" wand

	2" Faux Wood (inches)
Minimum Width	15
Maximum Width	96
Minimum Height	10
Maximum Height	72

Valance Option

Valance Type	Blind Type	Maximum Continuous Width		Control Type	Return Length (inches)	Full Recess Depth (inches)
		Inside Mount (inches)	Outside Mount (inches)			
3¼" Decorative Valance 	2" Faux wood	95½	96	Cordless lift, wand tilt	3¼	3
Valance Returns 1¼": Standard Inside Mount 3¼": Standard Outside Mount Flush Mount (no returns): Optional Request	2½" Faux wood	83½	84	Cordless lift, wand tilt	3¼	3

NOTE: Common Valance, Custom Valance Width and Custom Valance Returns are not available.

NOTE: For orders of 50 blinds or more, please call customer service for estimated delivery time.