

Dimensions and Installations Depth Requirements

Minimum Depth to Install	2 1/2"
Flush Mount Headrail	3"
Flush Mount Vanes	3 3/4"
Flush Mount DesignLine Valance	5"
Flush Mount Traditional Valance	6 1/4"
Flush Mount Transitional Valance	5 1/2"
Flush Mount Visions Valance	4 3/4"

Number of Installation Brackets and Valance Clips

Blind Width	Number of Brackets	Number of Valance Clips
Up to 66"	3	3
66 1/8" to 96"	4	4
96 1/8" to 126"	5	5
126 1/8" to 156"	6	6
156 1/8" to 186"	7	7
186 1/8" and above	8	8

Factory Deductions

	Inside Mount	Outside Mount
Headrail	1/4"	0"
Height	1/4"	0"
Vane Only	1 3/4"	1 1/2"

Size Limitations

One Way Minimum Width	Dual Stack Minimum Width	Center Stack Minimum Width	One Way, Dual, and Center Stack Maximum Width	Minimum Height- Vinyl	Minimum Height- Fabric	Maximum Height
-----------------------------	--------------------------------	-------------------------------------	--	-----------------------------	------------------------------	-------------------

Inside Mount (IM)	13 3/8"	25 7/8"	48"	188 3/8"	8 3/4"	13 3/4"	144"
Outside Mount (OM)	13 1/8"	25 5/8"	48"	188 3/8"	8 3/4"	13 3/4"	144"

Control Length

Blind Height	Cordless Wand Length
18" - 24"	12"
24 1/8" - 36"	20"
36 1/8" - 96"	33"
96 1/8" - 108"	47"
108 1/8" - 120"	59"
120 1/8" - 132"	69"
132 1/8" - 144"	80"

Length of cordless wand is from top of headrail

Blind Height	Cord Length
Less than 19"	12"
19 1/8" - 96"	7" less than total length
Over 96"	90"

Tilt chain is standard 42" unless otherwise specified

[Top](#)

Cleaning and Care

Your Levolor Vertical Blind seldom requires cleaning because the vanes hang vertically. However, all products and furnishings get soiled due to condensation, humidity, smoke and steam.

Recommended Cleaning Methods

Fabric Vanes

Periodic dusting or vacuuming will keep the fabric fresh. Spot clean any stains by applying a mild soap and water solution with a sponge or cloth. Check color fastness first by cleaning an inconspicuous area of the vane. Do not machine wash or dry clean.

Vinyl Vanes

Apply a mild soap and cold or warm water solution with a soft cloth or sponge. Abrasive or strong cleaners may scratch or mar the vane's surface. Dry with a cloth towel to avoid water marks.

Color Variation

Replacement vanes may be ordered to replace damaged vanes or for a decorating change. When ordering, indicate the style of blind and the number of vanes needed. Specify Finished Blind Height (height of blind including headrail) or Exact Vane Length (length of a vane excluding the headrail).

Note: There is no guarantee of color match to the original order. Pricing for individual vanes is on the far right of each price grid.

[Top](#)

Stacking Charts

These charts represent the amount of shade that is gathered to either side of the window when fully drawn. The measurements in these charts include the stack of the fabric.

Blind Width	No. of Vanes	One Way		No. of Vanes	Dual Draw	
		Stack Width	Clear Opening		Stack Width	Clear Opening
13-1/8"	4	3-7/8"	9-1/4"	--	--	--
16-1/4"	5	4-1/8"	12-1/8"	--	--	--
19-3/8"	6	4-1/2"	15"	--	--	--
22-1/2"	7	4-3/4"	17-3/4"	--	--	--
25-5/8"	8	5-1/8"	20-1/2"	8	3-7/8"	18"
28-3/4"	9	5-1/2"	23-1/4"	--	--	--
31-7/8"	10	5-3/4"	26"	10	4-1/8"	23-5/8"
35"	11	6-1/8"	28-7/8"	--	--	--

38-1/8"	12	6-1/2"	31-5/8"	12	4-1/2"	29"
41-1/4"	13	6-3/4"	34-1/2"	--	--	--
44-3/8"	14	7-1/8"	37-1/4"	14	4-3/4"	34-3/4"
47-1/2"	15	7-1/2"	40"	--	--	--
50-5/8"	16	7-3/4"	42-3/4"	16	5-1/4"	40-3/8"
53-3/4"	17	8-1/8"	45-5/8"	--	--	--
56-7/8"	18	8-1/2"	48-3/8"	18	5-1/2"	46"
60"	19	8-3/4"	51-1/4"	--	--	--
63-1/8"	20	9-1/8"	54"	20	5-3/4"	51-1/2"
66-1/4"	21	9-3/8"	56-7/8"	--	--	--
69-3/8"	22	9-3/4"	59-5/8"	22	6-1/8"	57"
72-1/2"	23	10-1/8"	62-3/8"	--	--	--
75-5/8"	24	10-3/8"	65-1/4"	24	6-1/2"	62-3/4"
78-3/4"	25	10-3/4"	68"	--	--	--
81-7/8"	26	11-1/8"	70-3/4"	26	6-3/4"	68-1/4"
85"	27	11-3/8"	73-1/2"	--	--	--
88-1/8"	28	11-3/4"	76-3/8"	28	7-1/8"	74"
91-1/4"	29	12-1/8"	79-1/8"	--	--	--
94-3/8"	30	12-3/8"	82"	30	7-1/2"	79-1/2"
97-1/2"	31	12-3/4"	84-3/4"	--	--	--
100-5/8"	32	13"	87-5/8"	32	7-3/4"	85-1/8"
103-3/4"	33	13-3/8"	90-1/4"	--	--	--
106-7/8"	34	13-3/4"	93"	34	8"	90-5/8"
110"	35	14"	96"	--	--	--
113-1/8"	36	14-3/8"	98-3/4"	36	8-1/2"	96-1/4"
116-1/4"	37	14-3/4"	101-1/2"	--	--	--
119-3/8"	38	15"	104-3/8"	38	8-3/4"	101-7/8"
122-1/2"	39	15-3/8"	107-1/8"	--	--	--
125-5/8"	40	15-3/4"	110"	40	9-1/8"	107-3/8"
128-3/4"	41	16"	112-3/4"	--	--	--
131-7/8"	42	16-3/8"	115-1/2"	42	9-3/8"	113"
135"	43	16-3/4"	118-1/2"	--	--	--
138-1/8"	44	17"	121"	44	9-3/4"	118-5/8"
141-1/4"	45	17-3/8"	123-7/8"	--	--	--
144-3/8"	46	17-5/8"	126-1/2"	46	10"	124-1/4"
147-1/2"	47	18"	129-1/2"	--	--	--
150-5/8"	48	18-3/8"	132-1/4"	48	10-3/8"	129-3/4"
153-3/4"	49	18-5/8"	135-1/8"	--	--	--


156-7/8"	50	19"	138"	50	10-3/4"	135-3/8"
160"	51	19-3/8"	140-5/8"	--	--	--
163-1/8"	52	19-5/8"	143-1/2"	52	11-1/8"	141"
166-1/4"	53	20"	146-1/4"	--	--	--
169-3/8"	54	20-3/8"	149"	54	11-1/2"	146-1/2"
172-1/2"	55	20-5/8"	151-7/8"	--	--	--
175-5/8"	56	21"	154-3/4"	56	11-3/4"	152-1/8"
178-3/4"	57	21-1/4"	157-1/2"	--	--	--
181-7/8"	58	21-5/8"	160-1/4"	58	12-1/8"	157-1/2"
185"	59	22"	163"	--	--	--
188-3/8"	60	22-1/4"	165-7/8"	60	12-3/8"	163-3/8"

Shade width in inches

[Top](#)

Specialty Shapes


Angle Top

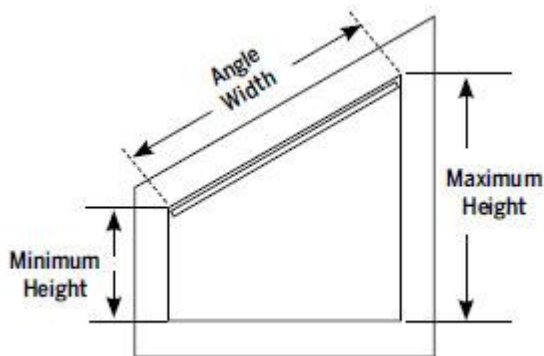

Give the following dimensions: Straight Width, Angle Width, Right Height, Left Height, Mounting Style: Inside or Outside, Control Side: Right or Left

NOTE: Not all angle top headrails traverse. Check with customer service at time of order.

Cutout

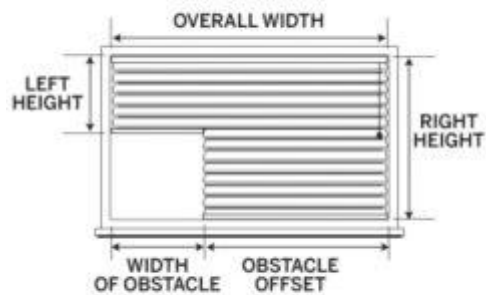

Measure the following:

1. The overall width of the blind
2. The right height of the blind
3. The left height of the blind
4. The width of the obstacle

NOTE: Allow 1/4" clearance for the obstacle. The overall width of the obstacle plus the obstacle offset must equal the overall width. Maximum of two cutouts per blind.